

# Technical Data Sheet



## Bituself Fleece Tape


<b>Description:</b>	Waterproofing tape with butyl rubber coating. Creped release liner with overlaps for easy removal.	
Material composition:	<b>Substrate:</b> Polypropylene needle-punch non-woven <b>Membrane:</b> FPO-Flexible Polyolefine <b>Coating:</b> Self-adhesive butyl rubber, high elastic, resistant to ageing <b>Liner:</b> Creped Release-foil	
Application:	Waterproofing repair tape in conjunction with the Bitumode System	
Color:	Grey (Membrane / Butyl rubber) White (PP non-woven)	
Total width (approx.):	200 mm	
Total thickness (approx.):	2.4 mm (with release-liner) 2.2 mm (without release liner)	
Material weight (approx.):	1615 g / m <sup>2</sup> (with release liner) 1525 g / m <sup>2</sup> (without release liner)	
Resistance to temperature: min. / max.	-30°C / +60°C	
Length per roll:	20 metres	
<b>Physical Properties: (approx.)</b>	<b>DIN</b>	<b>Value</b>
Breaking load MD	DIN EN 12311-2 Method A	> 420 N / 50 mm
Breaking load CMD	DIN EN 12311-2 Method A	> 180 N / 50 mm
Extension break MD	DIN EN 12311-2 Method A	30 %
Extension break CMD	DIN EN 12311-2 Method A	50 %
Peel test on neutral PVC carrier	Internal	> 13 N / 20 mm
<b>Chemical Properties:</b>	Resistance to a wide range of chemical liquids	

**Attention:** Due to technical reasons the colour of the material or the printing may vary slightly from batch to batch.

**Processing recommendations:** The release liner can best be removed at temperatures not exceeding +28°C

**Storage:** cool and dry, protect against sunlight, use within 12 months after receipt.

The above technical data represent average values. The technical information and application instructions are based on our experience and present knowledge. However, it is each users own responsibility to make trials with the original substrates in order to verify the suitability of our products for the intended purpose, taking into consideration all application related parameters. Please contact us if you have any further questions.

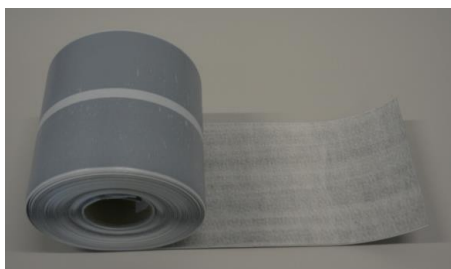

### Bitumode Qatar Waterproofing Factory

New Industrial Zone, Doha, Qatar  
Tel: (+974) 44 44 2717  
Fax: (+974) 44 44 2818  
P.O. Box 39199, Doha, Qatar  
Email: [info@bitumodeqatar.com](mailto:info@bitumodeqatar.com)  
Website: [www.bitumodeqatar.com](http://www.bitumodeqatar.com)

